

PHOTO COMING SOON

SM100P SERIES

100 WATT MEDICAL & ITE

SWITCHING POWER

SUPPLIES

UNIVERSAL INPUT

FEATURES

- ◆ Medical and industrial approvals
- ◆ Compact size 2" × 4" × 1.26"
- ◆ Ultra high power density 10 W/cubic inch
- ◆ Wide-range input 90-132 VAC, or 180-264 VAC
- ◆ Low earth leakage current
- ◆ Conducted EMI class B
- ◆ RoHS compliant

DESCRIPTION

The SM100P series of compact, open PCB constructed, AC-DC switching power supplies are capable of delivering 100 watts of continuous output power at convection. They operate at 90-264 VAC input voltage without the need of voltage selection, and are suited for medical, information technology and industrial applications. Approval to both EN 60601-1 and EN 60950-1 safety standards improves design-in time and reduces end equipment compliance costs.

INPUT SPECIFICATIONS

Input Voltage:	90-132 VAC or 180-264 VAC
Input Frequency:	47-63 Hz
Input Current:	1.9A (rms) for 100-120 VAC 1.0A (rms) for 200-240 VAC
Earth Leakage Current:	150 μ A max. @ 264 VAC, 63 Hz

ENVIRONMENTAL SPECIFICATIONS

Operating Temperature:	-10°C to +70°C
Storage Temperature:	-40°C to +85°C
Relative Humidity:	5% to 95% non-condensing
Derating:	Derate from 100% at +50°C linearly to 50% at +70°C
Cooling:	Convection Cooling

GENERAL SPECIFICATIONS

Switching Frequency:	62 K \pm 5 KHz
Efficiency:	80-88% typical except SM42P31-3A and SM42P31-5A at 75% typical
Hold-up Time:	12 msec minimum at 110 VAC
Line Regulation:	\pm 0.5% maximum at full load
Inrush Current:	25 A @ 115 VAC, or 50 A @ 230 VAC, at 25°C cold start
Withstand Voltage:	4000 VAC from input to output 1500 VAC from input to ground 500 VAC from output to ground
MTBF (25°C ambient):	400,000 hours at full load at 25°C ambient, calculated per MIL-HDBK-217F

EMC PERFORMANCE

EN55011 / EN55022:	Class B conducted, class A radiated
FCC:	Class B conducted, class A radiated
VCCI:	Class B conducted, class A radiated
EN61000-3-2:	Harmonic distortion, class A
EN61000-3-3:	Line flicker
EN61000-4-2:	ESD, \pm 8 KV air and \pm 6 KV contact
EN61000-4-3:	Radiated immunity, 3 V/m
EN61000-4-4:	Fast transient/burst, \pm 2 KV
EN61000-4-5:	Surge, \pm 1 KV diff, \pm 2 KV com.
EN61000-4-6:	Conducted immunity, 3V rms
EN61000-4-8:	Magnetic field immunity, 3A/m
EN61000-4-11:	Voltage dips, 30% reduction for 500 ms 60% reduction for 100 ms >95% reduction for 5 sec. Performance criteria A, B, A.

OUTPUT SPECIFICATIONS

Output voltage/current:	See rating chart
Total output power:	100 watts maximum
Ripple and noise:	250 mV peak to peak on 5.0V model , 1% peak to peak on other models.
Overvoltage protection:	Provided on output; set at 110-140% of its nominal output voltage
Overcurrent protection:	All outputs protected to short circuit conditions
Temperature coefficient:	All outputs \pm 0.04% /°C maximum
Transient response:	Maximum excursion of 4% or better on all models, recovering to 1% of final value within 500 μ s after a 25% step load change

SAFETY PENDING




OUTPUT VOLTAGE/CURRENT RATING CHART

Model	Vnom	Output			Tol.	Max. Power
		Imin	Imax			
SM100P10A	5 V	0 A	20 A		2%	100 W
SM100P12A	12 V	0 A	8.34 A		2%	100 W
SM100P13A	15 V	0 A	6.7 A		2%	100 W
SM100P13-1A	18 V	0 A	5.56 A		2%	100 W
SM100P14A	24 V	0 A	4.2 A		2%	100 W
SM100P15A	28 V	0 A	3.58 A		2%	100 W
SM100P17A	36 V	0 A	2.78 A		2%	100 W
SM100P18A	48 V	0 A	2.1 A		2%	100 W

Notes: Safety approvals are for PCB form only. To order unit with cover fitted, change suffix "A" to "C".

MECHANICAL SPECIFICATIONS

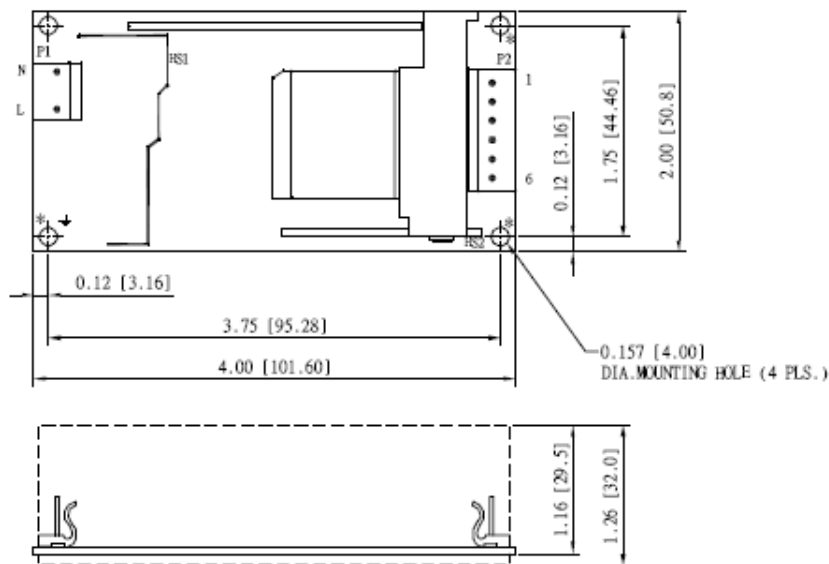

1. Dimensions shown in inches [mm]
2. Tolerance 0.02 [0.5] maximum
3. Input connector mates with Molex housing 09-50-3031 and Molex 2878 series crimp terminal.
4. Output connector mates with Molex housing 09-50-3061 and Molex 2878 series crimp terminal.
5. To ensure compliance with level B emissions, connect the three "*" marked mounting holes with metallic standoffs to chassis.
6. Weight: 190 grams (0.44 lbs.) approx.

PIN CHART

MODEL	PIN			1	2	3	4	5	6
SM100P10A	SM100P12A	SM100P13A							
SM100P13-1A	SM100P14A	SM100P15A	RETURN	RETURN	RETURN	OUTPUT	OUTPUT	OUTPUT	
SM100P17A	SM100P18A								

Note: All data are subject to change without notice