



SUP130P PFC SERIES 130 WATT POWER FACTOR CORRECTED SWITCHING POWER SUPPLIES

DESCRIPTION

The PFC130 series incorporates creative high efficiency circuitry, high power density (6.94 Watts/in³) and active Power Factor Correction (PFC) to meet the requirements of data networking, computing and telecommunication systems. Some models with one or two outputs adjustable between 5V and 24V intend to suit more applications.

FEATURES

- ◆ EN61000-3-2 class A and D compliant
- ◆ Power factor 0.98 typical
- ◆ Very compact size, 3" x 5" x 1.2"
- ◆ Overvoltage protection
- ◆ Short circuit protection
- ◆ Remote sense on 3.3V output
- ◆ Power Good/Power Fail Detect signal
- ◆ Up to five DC outputs
- ◆ All outputs are well regulated

EMC PERFORMANCE

EN55022	Class B conducted, Class A radiated
FCC Part 15	Class B conducted, Class A radiated
VCCI	Class B conducted, Class A radiated
EN61000-3-2	Harmonic distortion, Class A and D
EN61000-3-3	Line flicker
EN61000-4-2	ESD, +/- 8KV air and +/- 4KV contact
EN61000-4-3	Radiated immunity, 3V/m
EN61000-4-4	Fast transient/burst, +/- 1KV
EN61000-4-5	Surge, +/- 1KV diff, +/- 2KV com.
EN61000-4-6	Conducted immunity, 3Vrms
EN61000-4-8	Magnetic field immunity, 1A/m
EN61000-4-11	Voltage dips, 30% reduction for 500ms and >95% reduction for 10ms Interruptions, >95% for 5000 ms

PFD Signal: TTL logic high for normal operation and TTL logic low upon loss of input power. This signal appears at least 10ms prior to master output dropping 5% below its nominal value. This signal also provides a minimum delay of 100 ms after master output is within regulation

OUTPUT SPECIFICATIONS

Output Voltage/Current:	See Rating Chart
Ripple & Noise:	65mV peak to peak on V1, 1% peak to peak on other outputs
Overvoltage Protection;	Provided on V0 & V1; set at 112 - 132 % of its nominal output voltage
Overcurrent Protection:	All outputs protected to short circuit conditions
Temperature Coefficient:	All outputs $\pm 0.04\%$ / °C maximum
Transient Response:	Maximum excursion of 4% or better on all models; recovering to 1% of final value within 500 μ S after a 25% step load change

GENERAL SPECIFICATIONS

Switching Frequency:	100KHz \pm 10KHz
Power Factor:	0.98 typical
Efficiency:	75% typical
Hold-up Time:	15msec minimum at 115VAC
Line Regulation:	$\pm 0.5\%$ maximum at full load
Inrush Current (25° C cold start):	35 amps @ 115VAC or 70 amps @ 230VAC at 25°C cold start
Withstand Voltage:	3000VAC from input to output 1500VAC from input to ground 500VAC from output to ground
MTBF (25° C ambient):	200,000 hours minimum

INPUT SPECIFICATION

Input voltage:	90 to 264 VAC
Input frequency:	47 to 63 Hz
Input current:	2.1A (rms) max. for 115VAC 1.1A (rms) max. for 230VAC
Touch current:	0.3mA max. @ 115VAC, 60Hz 0.6mA max. @ 230VAC, 50Hz

ENVIRONMENTAL SPECIFICATION

Operating Temperature:	-10°C to +60°C
Storage Temperature:	-40°C to +85°C
Relative Humidity:	5% to 95% non-condensing
Derating:	Derate from 100% at +40°C linearly to 50% at +60°C
Cooling:	10 CFM total forced air from two 40mm diameter fans or the like is required and provided by user



OUTPUT VOLTAGE/CURRENT RATING CHART


(1)(2)(3) (6)(7) Model	V1 (4) 5CFM 10CFM				V2 5CFM 10CFM				V3 (5) 5CFM 10CFM				V4 (5) 5CFM 10CFM				V0 5CFM 10CFM			
	Vnom	Imin	Imax	Tol.	Vnom	Imax	Imax	Tol.	Vnom	Imin	Imax	Tol.	Vnom	Imin	Imax	Tol.	Vnom	Imin	Imax	Tol.
SUP130P23-3	+5.1V	8A	12A	2%	(N/A)				(N/A)				(N/A)				+3.3V	8A	12A	2%
SUP130P23	+5.1V	8A	12A	2%	+12V	3.25A	6A	3%	(N/A)				(N/A)				(N/A)			
SUP130P24	+5.1V	8A	12A	2%	+15V	2.6A	4.8A	3%	(N/A)				(N/A)				(N/A)			
SUP130P25	+5.1V	8A	12A	2%	+24V	1.63A	3A	3%	(N/A)				(N/A)				(N/A)			
SUP130P31	+5.1V	8A	12A	2%	+12V	3.25A	6A	3%	+5V~+24V	0.5A	1A	2%	(N/A)				(N/A)			
SUP130P32	+5.1V	8A	12A	2%	+15V	2.6A	4.8A	3%	+5V~+24V	0.5A	1A	2%	(N/A)				(N/A)			
SUP130P33	+5.1V	8A	12A	2%	+24V	1.63A	3A	3%	+5V~+24V	0.5A	1A	2%	(N/A)				(N/A)			
SUP130P34	+5.1V	8A	12A	2%	+12V	3.25A	6A	3%	(N/A)				-5V~-24V	0.5A	1A	2%	(N/A)			
SUP130P35	+5.1V	8A	12A	2%	+15V	2.6A	4.8A	3%	(N/A)				-5V~-24V	0.5A	1A	2%	(N/A)			
SUP130P36	+5.1V	8A	12A	2%	+24V	1.63A	3A	3%	(N/A)				-5V~-24V	0.5A	1A	2%	(N/A)			
SUP130P31-3	+5.1V	8A	12A	2%	+12V	3.25A	6A	3%	(N/A)				(N/A)				+3.3V	8A	12A	2%
SUP130P33-3	+5.1V	8A	12A	2%	+15V	2.6A	4.8A	3%	(N/A)				(N/A)				+3.3V	8A	12A	2%
SUP130P39-3	+5.1V	8A	12A	2%	+24V	1.63A	3A	3%	(N/A)				(N/A)				+3.3V	8A	12A	2%
SUP130P41	+5.1V	8A	12A	2%	+12V	3.25A	6A	3%	+5V~+24V	0.5A	1A	2%	-5V~-24V	0.5A	1A	2%	(N/A)			
SUP130P42	+5.1V	8A	12A	2%	+15V	2.6A	4.8A	3%	+5V~+24V	0.5A	1A	2%	-5V~-24V	0.5A	1A	2%	(N/A)			
SUP130P43	+5.1V	8A	12A	2%	+24V	1.63A	3A	3%	+5V~+24V	0.5A	1A	2%	-5V~-24V	0.5A	1A	2%	(N/A)			
SUP130P41-3	+5.1V	8A	12A	2%	+12V	3.25A	6A	3%	+5V~+24V	0.5A	1A	2%	(N/A)				+3.3V	8A	12A	2%
SUP130P42-3	+5.1V	8A	12A	2%	+15V	2.6A	4.8A	3%	+5V~+24V	0.5A	1A	2%	(N/A)				+3.3V	8A	12A	2%
SUP130P43-3	+5.1V	8A	12A	2%	+24V	1.63A	3A	3%	+5V~+24V	0.5A	1A	2%	(N/A)				+3.3V	8A	12A	2%
SUP130P44-3	+5.1V	8A	12A	2%	+12V	3.25A	6A	3%	(N/A)				-5V~-24V	0.5A	1A	2%	+3.3V	8A	12A	2%
SUP130P45-3	+5.1V	8A	12A	2%	+15V	2.6A	4.8A	3%	(N/A)				-5V~-24V	0.5A	1A	2%	+3.3V	8A	12A	2%
SUP130P46-3	+5.1V	8A	12A	2%	+24V	1.63A	3A	3%	(N/A)				-5V~-24V	0.5A	1A	2%	+3.3V	8A	12A	2%
SUP130P51-3	+5.1V	8A	12A	2%	+12V	3.25A	6A	3%	+5V~+24V	0.5A	1A	2%	-5V~-24V	0.5A	1A	2%	+3.3V	8A	12A	2%
SUP130P52-3	+5.1V	8A	12A	2%	+15V	2.6A	4.8A	3%	+5V~+24V	0.5A	1A	2%	-5V~-24V	0.5A	1A	2%	+3.3V	8A	12A	2%
SUP130P53-3	+5.1V	8A	12A	2%	+24V	1.63A	3A	3%	+5V~+24V	0.5A	1A	2%	-5V~-24V	0.5A	1A	2%	+3.3V	8A	12A	2%

Notes:

- The outputs of each model are from two independent channels. Channel #1 consists of the main output V1 and auxiliary output V0. Channel #2 consists of the main output V2 and auxiliary outputs V3 and V4. The maximum output power that may be drawn from each channel is 45W with 5 CFM forced-air cooling or 65W with 10 CFM forced-air cooling. The derating curve on the right provides guidelines on application within the specified operating temperature range.
- "5 CFM Imax." ("10 CFM Imax.") is the maximum current of individual output when 5 CFM (10 CFM) forced air is provided. Under a specific cooling condition, both the maximum output power stated is note #1 and the maximum current of individual output must not be exceeded.
- The zener diodes, ZD5 and ZD11~ZD14, on trace side are hot during operation and hence need cooling. It is recommended that a power supply is mounted on 8.0mm (0.32") high standoffs to a system chassis to keep safety distances, and cooling fan(s) is (are) at the location and in the direction of the arrow in the mechanical drawing such that about one—fifth of airflow is under the PCB
- V1 needs a minimum current of 0.8A to support output V0 at its maximum rated load.
- The total output power of V3 and V4 should not exceed 30W. V3 is adjustable between +5V and +24V, and set at +12V as standard. V4 is adjustable between -5V and -24V, and set at -12V as standard. It is welcome to consult factory for the two outputs to be set at wanted voltages within the adjustable ranges.
- Ripple and noise is measured peak to peak across a 20MHz bandwidth by using a 12 inch twisted pair terminated with a 10µF tantalum capacitor in parallel with a 0.1µF ceramic capacitor.
- "Tol." is output voltage tolerance which includes initial set-up error, thermal drift, line regulation, load regulation and cross regulation.


DERATING CURVE

Output Power (W)

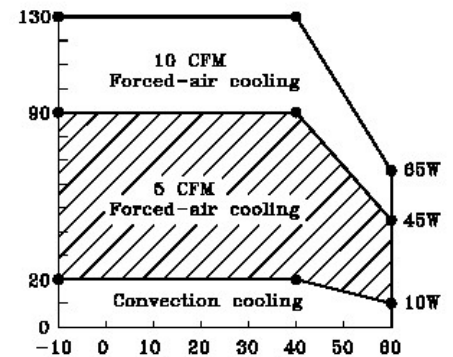

Ambient Temperature (°C)

MECHANICAL SPECIFICATIONS

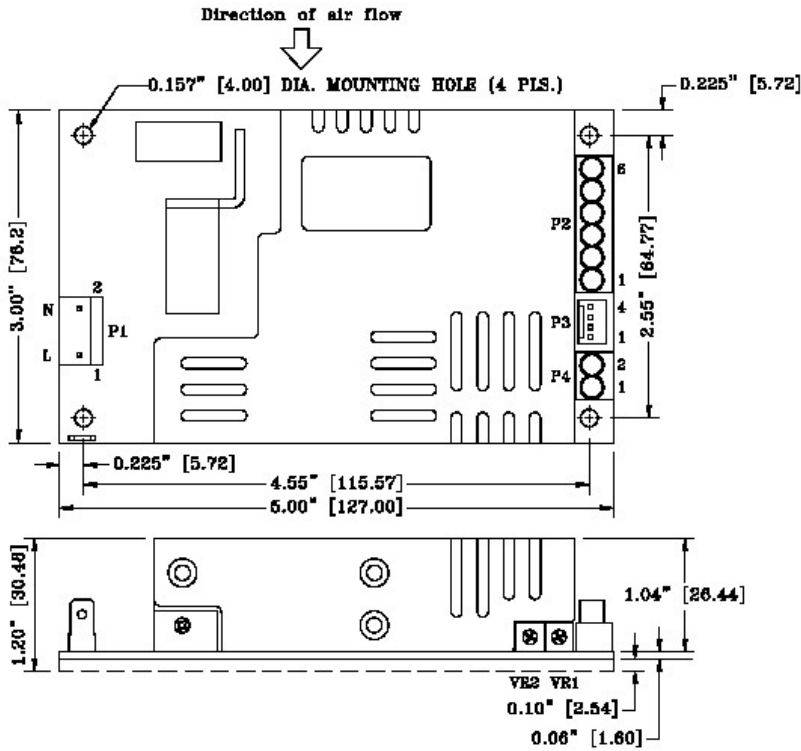

Notes:

1. Dimensions shown in inch [mm]
2. Tolerance 0.02 [0.5] maximum
3. Connector P1 mates with Molex housing 09-50-3031 and Molex 2878 series crimp terminal.
4. Connectors P2 and P4 are suitable for AWG#18~AWG#12 electric wires.
5. Connector P3 mates with Molex housing 22-01-1043 and Molex 40445 series crimp terminal.
6. Weight: 0.32 Kgs (0.71 Lbs.) approx.
7. Potentiometers for output voltage adjustment : VR1 for V1, VR2 for V0, VR3 for V3, VR4 for V4 (VR3 and VR4 being SMD type on trace side)

PIN CHART

CONN PIN	P1		P2						P3				P4		
	1	2	1	2	3	4	5	6	1	2	3	4	1	2	
MODEL SUP130P23-3A	AC LIVE	AC NEUTRAL	V1	COM. RET.	COM. RET.	N.C.	N.C.	N.C.	-SENSE (V0)	+SENSE (V0)	PG/PFD Signal	COM. RET.	V0	COM. RET.	
SUP130P23A SUP130P25A								SUP130P24A	V2	N.C.			N.C.	VOID	
SUP130P31A SUP130P33A	AC LIVE	AC NEUTRAL	V1	COM. RET.	COM. RET.	N.C.	V3	N.C.	V2	N.C.	N.C.	PG/PFD Signal	COM. RET.	VOID	
SUP130P34A SUP130P36A							SUP130P35A	N.C.		V4	N.C.			V0	COM. RET.
SUP130P31-3A SUP130P39-3A	AC LIVE	AC NEUTRAL	V1	COM. RET.	COM. RET.	N.C.	V3	V4	V2	-SENSE (V0)	+SENSE (V0)	PG/PFD Signal	COM. RET.	V0	COM. RET.
SUP130P41A SUP130P43A										SUP130P42A	N.C.			N.C.	VOID
SUP130P41-3A SUP130P43-3A	AC LIVE	AC NEUTRAL	V1	COM. RET.	COM. RET.	N.C.	V3	N.C.	V2	-SENSE (V0)	+SENSE (V0)	PG/PFD Signal	COM. RET.	V0	COM. RET.
SUP130P44-3A SUP130P46-3A										SUP130P45-3A	N.C.			V4	VOID
SUP130P51-3A SUP130P53-3A	AC LIVE	AC NEUTRAL	V1	COM. RET.	COM. RET.	V3	V4	V2	-SENSE (V0)	+SENSE (V0)	PG/PFD Signal	COM. RET.	V0	COM. RET.	

Note: All data are subject to change without notice

